YNB (XIAMEN) LTD.
NO.11 HULI IND. PARK, MEIXI RD., HUANDONGHAIYU, XIAMEN, 361100, CHINA
TEL: +86-592-6036020 FAX: +86-592-6036981 E-mail: **ynb1cn@aol.com**


TECHNICAL DATA SHEET (Dated January 11st / 2014)

PRODUCT: DE-52B50

A two pieces type induction foil liner, which will provide an aggressive bond with welded removal from PE (Polyethylene) bottles

SCOPE:

/containers.
The paper board backing is printed with a black glove that indicates instructions of handling, opening and cutting cap.
This product had been designed to be applied in high corrosive and aggressive agrochemicals (i.e. Paraquat salt) and available in 480 mm master rolls, cut in customer's suggested width or cut in disk shapes.

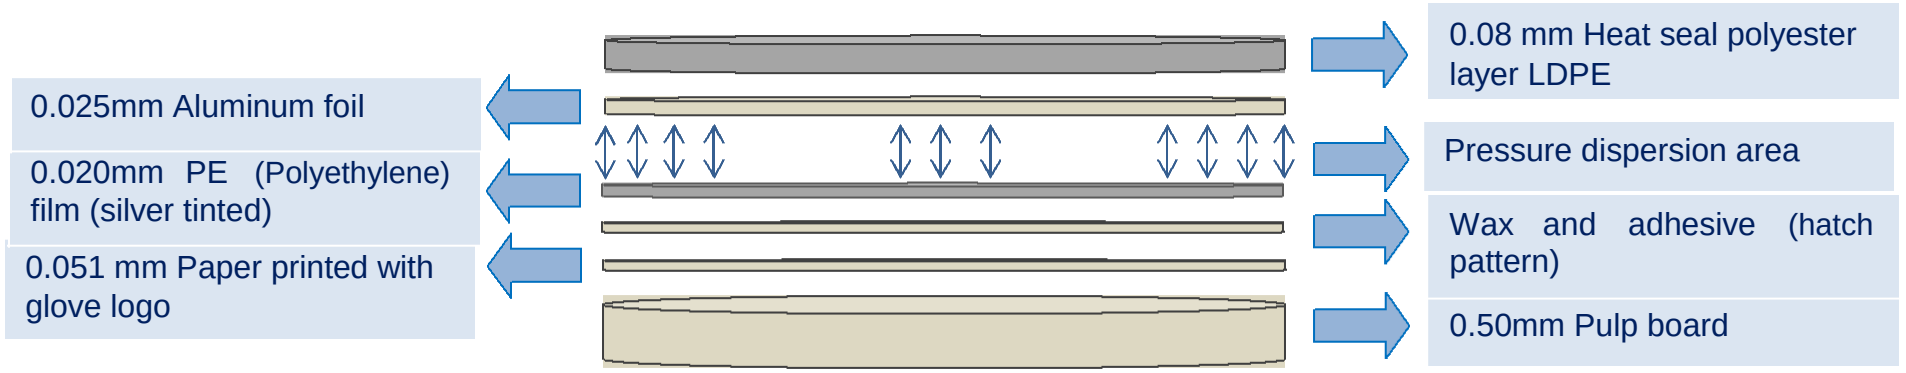

Overall caliper: 1.2 mm +/- 0.05%

Handling and storage: DE-52B93 is a heat sensitive liner; storage at high temperatures can cause separating board backing from face part, by the moment DE-52B93 is set into the cap it is recommended to store between 14 ºC – 40 ºC and 38.5% – 62.5% rel. humidity.

Storage life recommended: Between 12 – 14 months.

FDA STATUS: All components comply with 21 CFR 177.1210

Backed by Bayer *Syngenta Agro science* *Dow Agro science*